There's a reliable LIGHTBURN HYDRAULIC JACK

for every vehicle!

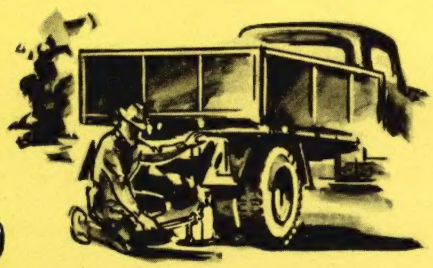

USED BY THE WORLD'S MAJOR MOTOR COMPANIES

The British Motor Corporation (Austin and Nuffield), Chrysler, Ford, General Motors, International Harvester Co. and Rootes Group all use LIGHTBURN Jacks as standard original equipment in the vehicles they produce.

15 MODELS TO CHOOSE FROM

EXPORTED TO MORE THAN 70 OVERSEAS COUNTRIES

F 2168

CHOOSE THE LIGHTBURN JACK WHICH

BUMPER BAR & SIDE LIFT MODEL

Cat. No. B1.

Tested to lift 2240 *lbs. or* 1016 *kgs.*

Built especially for passenger cars and light utilities designed with or without lifting sockets. Available with special hooks to suit any bumper bar or lifting socket.

1 TON DUAL LIFT MODEL

Cat. No. D1

Tested to lift 2000 *lbs. or* 907 *kgs.*

Suitable for passenger and light commercial vehicles having low slung suspension and lifting points.



2 TON DUAL LIFT MODEL

Cat. No. D2

Tested to lift 4480 *lbs. or* 2032 *kgs.*

Suitable for low slung vehicles. Designed to give maximum power raise and extended height to cover wide variations in lifting conditions.

2 TON MODEL Cat. No. A2.

Tested to lift 4480 *lbs. or* 2032 *kgs.*

Ideal for medium size utilities and panel vans up to 2½ tons gross weight.

3 TON MODEL Cat. No. A3.

Tested to lift 6720 *lbs. or* 3048 *kgs.*

Suitable for light trucks and heavy duty vans up to 3½ tons nominal load capacity.

4 TON MODEL Cat. No. A4.

Tested to lift 8960 *lbs. or* 4064 *kgs.*

Suitable for trucks up to 5 tons nominal load capacity.

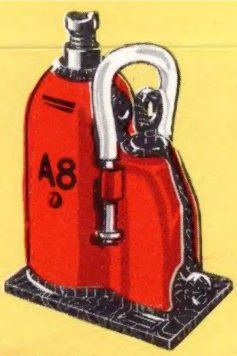

8 TON MODEL Cat. No. A8.

Tested to lift 17920 *lbs. or* 8128 *kgs.*

Suitable for large-tyred, heavy duty trucks and semi-trailers.

9 TON MODEL Cat. No. A9.

Tested to lift 20160 *lbs. or* 9144 *kgs.*

Suitable for extra heavy duty trucks, semi-trailers or similar type vehicles.

10 TON MODEL Cat. No. A10

Tested to lift 22400 *lbs. or* 10160 *kgs.*

Designed for large-tyred, extra heavy duty trucks and semi-trailers, tractors and earth moving equipment.

Look for this Emblem ANOTHER LIGHTBURN PRODUCT it's

H HAS BEEN DESIGNED FOR YOUR VEHICLE



1 TON MODEL Cat. No. A1.

Tested to lift 2240 *lbs. or* 1016 *kgs.*

Ideal for passenger cars and utilities up to 1½ tons gross weight.



1½ TON MODEL Cat. No. A1½.

Tested to lift 3360 *lbs. or* 1524 *kgs.*

Suitable for passenger cars and light commercial vehicles up to 2 tons gross weight.



5 TON MODEL Cat. No. A5.

Tested to lift 11200 *lbs. or* 5080 *kgs.*

Suitable for large-tyred trucks up to 5 tons nominal load capacity.



7 TON MODEL Cat. No. A7.

Tested to lift 15680 *lbs. or* 7112 *kgs.*

Ideal for heavy duty trucks up to 7 tons nominal load capacity.

12 TON MODEL Cat. No. A12.

Tested to lift 26880 *lbs. or* 12192 *kgs.*

Suitable for the largest trucks and semi-trailers, extra heavy duty tractors and earth moving equipment.

12 TON MODEL Cat. No. E12.

Tested to lift 26880 *lbs. or* 12192 *kgs.*

Designed for general engineering and maintenance applications or heavy lifting in confined spaces.

EVERY LIGHTBURN JACK IS...

Perfectly Balanced



There's never any need to get under the vehicle to use a LIGHTBURN Jack! They automatically assume an upright position when lifted by the handle . . . and the handle is notched so that it can be used to withdraw the jack as well.

Easy to Lower

With LIGHTBURN Jacks, lowering is smooth and positively controlled! To lower . . . the handle is withdrawn from the body socket only and turned left or right.
There's no groping around for release valves!

Safety Tested

Every LIGHTBURN Jack is thoroughly safety tested to lift its rated capacity. Excess loading operates the safety release.
There's no chance of overloading . . . you can't damage the jack—and you avoid a dangerous lift.

more than a name . . . it's a guarantee.

HERE'S THE SECRET OF THE LIGHTBURN

Quick, Effortless, Positive Lift!

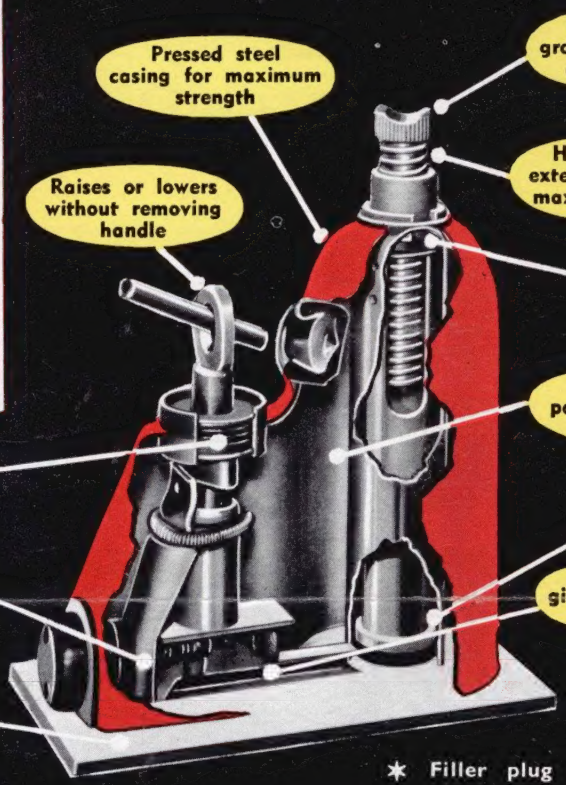
Pressed steel casing for maximum strength
Hardened steel grooved headcap for complete safety
Raises or lowers without removing handle
Hardened steel extension screw for maximum strength
Special ram gland prevents oil leakage
All working parts immersed in oil
Easily removable leakproof oil seal for piston
Plastic impregnated ram leather for long life
Safety valve and release mechanism prevent overloading
Oil filter gives trouble-free operation
Large sled-type base for maximum stability

✱ Completely sealed against dust and dirt.

✱ Gives greater lift for less closed height.

✱ Filler plug for replenishment of oil to correct operating level.

READ THESE SPECIFICATIONS

Type	Bumper	Dual		Under axle											
Cat. No	B1	D1	D2	A1	A1½	A2	A3	A4	A5	A7	A8	A9	A10	A12	E12
Capacity: Tons	1		2	1	1½	2	3	4	5	7	8	9	10	12	12
Pounds	2240	2000	4480	2240	3360	4480	6720	8960	11200	15680	17920	20160	22400	26880	26880
Kilograms	1016	907	2032	1016	1524	2032	3048	4064	5080	7112	8128	9144	10160	12192	12192
Closed Height ins.	26	5	5⅛	6-5/16	6-15/16	6-15/16	7½	8	8-11/16	8⅜	9½	9½	10-5/16	11⅛	8⅛
Screw Extension ins.	—	—	2½	2½	3	2½	3	3½	3⅜	4½	4	4¼	5	5	4¼
First Lift ins.	—	3-13/32	3½	—	—	—	—	—	—	—	—	—	—	—	—
Second Lift ins.	—	2-31/32	2⅞	—	—	—	—	—	—	—	—	—	—	—	—
Hook, Low Posit. ins.	3¾	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hook, High Posit. ins.	19¼	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Power Raise ins.	15¾	6¾	6⅛	4¾	5⅜	5⅜	5⅜	5-13/16	6-7/16	6½	6¾	6¾	7½	8½	5½
Full Height ins.	—	11⅜	13¾	13-9/16	15-5/16	14-13/16	16⅜	17-5/16	18¾	19½	20¼	20½	22-13/16	24⅜	17⅞
Size of Base ins.	5¾ × 5¾	7⅜ × 4½	7⅜ × 4½	6¾ × 3½	6¾ × 3½	6¾ × 3½	7 × 3½	7¼ × 4½	7¼ × 4½	8⅛ × 5	8⅛ × 5	8⅛ × 5	8½ × 5½	9 × 5½	8⅛ × 5
Handle Length ins.	15	31	31	31	31	31	31	27	27	27	27	27	27	27	27
Weight lbs.	10.8	7.3	8.5	6.5	6.8	6.8	7.8	11.5	12.3	18.0	19.9	22.9	26.3	27.0	20.4

NOTE.—When measuring lifting height under your vehicle, do not forget to take into consideration the height of the vehicle when the tyre is deflated.

AVAILABLE FROM

DISTRIBUTED BY

Hi-Lift® JACK CO.
P. O. DRAWER 228
BLOOMFIELD
INDIANA, U.S.A.

LIGHTBURN JACKS GIVE MAXIMUM STABILITY AND SAFETY!

They're the most stable jacks in the world. The combination of a specially designed hardened steel headcap and a large area base ensures that the load will be taken directly through the exact centre of the jack. This gives positive grip – maximum strength – complete stability–guaranteed safety.

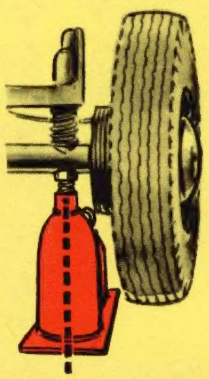

ONLY LIGHTBURN JACKS HAVE A SERVICE SET UP LIKE THIS!

Every LIGHTBURN Hydraulic Jack is fully guaranteed for 6 months and requires a minimum of service. Internal components are completely accessible . . . all spare parts are readily available. When required, service or repairs can be carried out promptly by your supplier or an authorised LIGHTBURN agent.

LIGHTBURN PRODUCTS LTD.

Morphett Road, Camden, South Australia

Postal Address: Box 1340H, G.P.O., Adelaide — Cables: LIGHTBURNCO, Adelaide.